

WFYEAR ELECTRONICS

GLOBAL 3C ACCESSORY SOLUTIONS

2026 POWER & CHARGING PRODUCT SELECTION GUIDE

GaN Chargers | Charging Cables | Wireless Charging | Power Banks | Car Chargers

UP TO 140W FAST CHARGING

High-power charging solutions for phones, tablets and laptops

MULTI-REGION PLUG OPTIONS

US | EU | UK | AU | CN and more

OEM / ODM CUSTOMIZATION

Branding | Colors | Packaging | Product configuration

BUILT FOR GLOBAL B2B MARKETS

Selection support for distributors, brands and importers

Hangzhou WFYEAR Electronics Co., Ltd. | Your Reliable OEM/ODM Partner for 3C Accessories



GaN FAST CHARGING



CHARGING CABLES



WIRELESS & POWER



CAR CHARGING

www.wfyear.net

Powered by SPR/AVS Dual Technologies

Dynamic allocation, intelligent fast charging



RobotRetract 65W



UK



US




EU



CN

SPECS

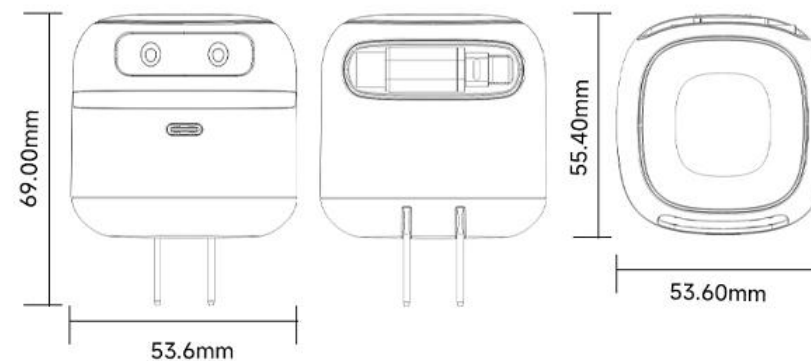

Name: RobotRetract 65W

Model: RY-C65D

Color: White

Built-in Cable: 70CM Retractable

Input: 110-240V~50/60Hz 1.8A

Output:

TYPE-C: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3.25A (Max: 65W)

Retractable: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3.25A (Max: 65W)

Total Output:

TYPE-C+Retractable: 45W+12W

TYPE-C: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/2.25A

Retractable: 5V/2.4A

Compatibility: phones, tablets, laptops etc.

TFT 65W ACC



Model: RY-U65J-ACC

Input: 100-240V-50/60Hz 1.8A

Output: TYPE-C1/C2: 65W (Max)

USB: 18W (Max)

Total Output: USB+TYPE-C1: 18W+45W

TYPE-C1+TYPE-C2: 45W+20W

USB+TYPE-C2: 15W


TYPE-C1+USB+TYPE-C2: 45W+15W



US



EU



UK

TFT 100W ACC



Model: RY-U101B-ACC

Input: 100-240V-50/60Hz 2A

Output: TYPE-C1/C2: 100W (Max)

USB: 30W (Max)

Total Output: TYPE-C1+USB: 65W+30W

TYPE-C1+TYPE-C2: 65W+35W

TYPE-C2+USB: 15W

TYPE-C1+TYPE-C2+USB: 65W+15W



US



EU



UK

Retractable 45W A+C+C



Model: RY-U45G-ACC

Input: 100-240V-50/60Hz 1.2A

Output: USB: 27W

TYPE-C: 45W (Max)

Retractable: 45W (Max)

Total Output: TYPE-C+Retractable: 5V3.6A

TYPE-C+USB-A: 5V3.6A

USB-A+Retractable: 5V3.6A

TYPE-C+Retractable+USB-A: 5V3.6A



US

EU

UK

Retractable 65W A+C+C



Model: RY-U65G-ACC

Input: 100-240V-50/60Hz 1.8A

Output: USB: 18W

TYPE-C: 65W (Max)


Retractable: 65W (Max)

Total Output: TYPE-C+Retractable: 45W+15W

USB-A+Retractable: 15W

TYPE-C+USB-A: 45W+15W

TYPE-C+ (Retractable+USB-A): 45W+15W

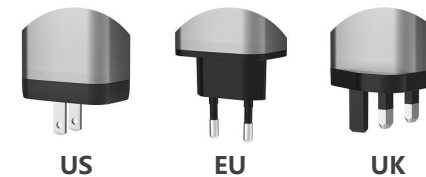

US

EU

UK

JN PI 100W A+C+C




Model: RY-C101G-ACC

Input: 100-240V-50/60Hz 1.8A

Output: TYPE-C1/C2: 100W (Max)
USB: 30W (Max)

Total Output: USB+TYPE-C1: 30W+45W
TYPE-C1+TYPE-C2: 45W+45W
USB+TYPE-C2: 5V3A
USB+TYPE-C1+TYPE-C2: 45W+15W

PI Chip

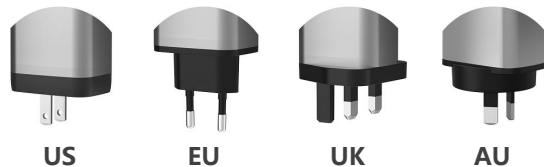

TFT Retractable 100W A+C




Model:

Input: 100-240Vac 50/60HZ 2A MAX

Output:

TYPE-C1 (Cable) : 5V3A/9V3A/12V3A/15V3A/20V=5A (Max: 100W);
3.3V-21V/5A
TYPE-C2: 5V3A/9V3A/12V3A/15V3A/20V=5A (Max: 100W); 3.3V-21V/5A
USB-A: 5V3A/9V3A/12V2.5A/15V2A/20V1.5A (Max: 30W)

Total Output: TYPE-C1+TYPE-C2: 65W+35W
TYPE-C1+USB-A: 65W+30W;
TYPE-C2+USB-A: 5V=3A
TYPE-C1+TYPE-C2+USB-A: 65W+15W;
TYPE-C2+USB-A: 5V=3A

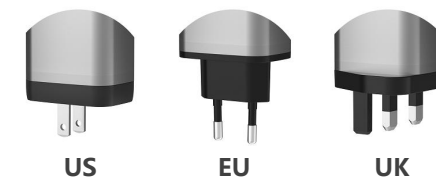

JN Universal 100WA+C



Model: RY-U67E-AC GaN
 Input: 200-240V-50/60Hz 1.8A
 Output: USB-A: 100W (Max)
 TYPE-C: 67W (Max)
 USB-A+TYPE-C: 80W+20W


***Universal Compatible**



JN 67W 1A2C



Model: RY-U67E-ACC GaN
 Input: 100-240V-50/60Hz 1.7A
 Output: TYPE-C1/C2: 67W (Max)
 USB-A: 30W (Max)
 Total Output: TYPE-C1+TYPE-C2: 45W+20W
 TYPE-C1+USB-A: 45W+18W
 TYPE-C1+ (TYPE-C2+USB-A) : 45W+15W

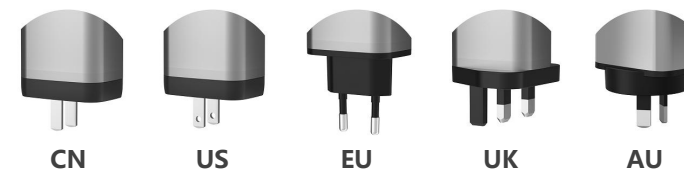

U45H-ACC



Model: RY-U45H-ACC GaN

Input: 100-240V-50/60Hz 1.2A

Output: USB-A: 18W

Type-C1: 45W (Max)


Type-C2: 20W (Max)

Total Output: USB-A+Type-C1: 18W+25W

USB-A+Type-C2: 15W

Type-C1+Type-C2: 25W+20W

Type-C1+Type-C2+USB-A: 25W+15W

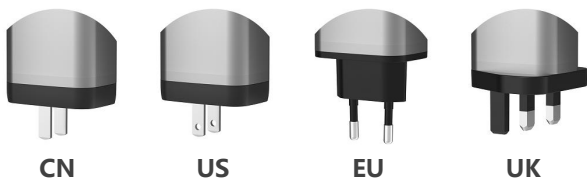

CN

US

EU

UK

U65H-ACC



Model: RY-U65H-ACC GaN

Input: 100-240V-50/60Hz 1.8A

Output: USB-A: 18W

Type-C1: 65W (Max)


Type-C2: 20W (Max)

Total Output: USB-A+Type-C1: 18W+45W

USB-A+Type-C2: 15W

Type-C1+Type-C2: 45W+20W

Type-C1+Type-C2+USB-A: 45W+15W

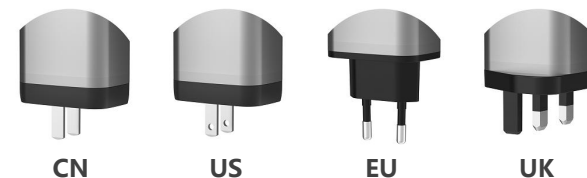

CN

US

EU

UK

SD 140W 1A3C



Model: RY-U140A-ACCC GaN

Input: 100-240V-50/60Hz 2.5A

Output: TYPE-C1: 140W (Max)
C2/C3/USB-A: 30W (Max)

Total Output: C1+C2: 100W+20W C1+C3: 100W+20W
C1+USB-A: 100W+30W C2+C3: 30W+30W
C2+USB-A: 30W+30W C3+USB-A: 15W
C1+C2+C3: 65W+20W+20W
C1+C2+USB-A: 65W+20W+30W
C2+ (C3+USB-A) : 30W+15W
C1+C2+ (C3+USB-A) : 65W +20W+15W



US

EU

UK

SD 100W 1A3C




Model: RY-C101D-ACCC GaN

Input: 100-240V-50/60Hz 2A

Output: TYPE-C1: 100W (Max)
TYPE-C1/C2/ USB-A: 30W (Max)

Total Output:
C1+C2: 65W+30W C1+C3: 65W+30W C2+C3: 30W+30W
C1+USB-A: 65W+30W C2+USB-A: 30W+30W C3+USB-A: 15W
C1+C2+USB-A: 60W+18W+18W C1+C2+C3: 60W+18W+18W
C1+ (C3+USB-A) : 65W+15W C2+ (C3+USB-A) : 30W+15W
C1+C2+ (C3+USB-A) : 60W+18W+15W

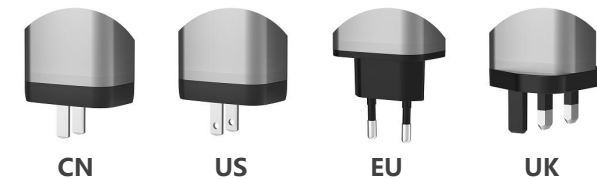

CN

US

EU

UK

SD 100W C



Model: RY-C101D-C GaN

Input: 100-240V-50/60Hz 2A


Output: 100W (Max)



US



EU



UK

SD 100W 1A2C



Model: RY-C101D-ACC GaN

Input: 100-240V-50/60Hz 2A

Output: TYPE-C1/C2: 100W (Max)

USB-A: 30W (Max)

Total Output: TYPE-C1+TYPE-C2: 65W+35W

TYPE-C1+USB-A: 65W+30W

TYPE-C1+ (TYPE-C2+USB-A) : 65W+15W




CN



US



EU



UK

SD Universal 65W A+C



Model: RY-U65D Universal GaN

Input: 100-240V~50/60Hz 1.8A

Output : TYPE-C: (Max: 65W) USB-A: (Max: 65W)


Model: RY-U120D Universal GaN

Input: 200-240V~50/60Hz 1.8A

Output : TYPE-C: (Max: 65W) USB-A: (Max: 65W)

***Universal Compatible**

***Shared A/C ports, NOT for simultaneous use**

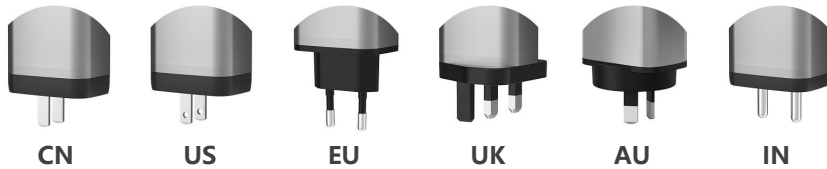

SD Universal 120W A+C



Model: RY-U120D Universal GaN

Input: 100-240V~50/60Hz 1.8A

Output : TYPE-C: (Max: 65W) USB-A: (Max: 65W)


Model: RY-U120D Universal GaN

Input: 200-240V~50/60Hz 1.8A

Output : TYPE-C: (Max: 65W) USB-A: (Max: 120W)

***Universal Compatible**


***Shared A/C ports, NOT for simultaneous use**

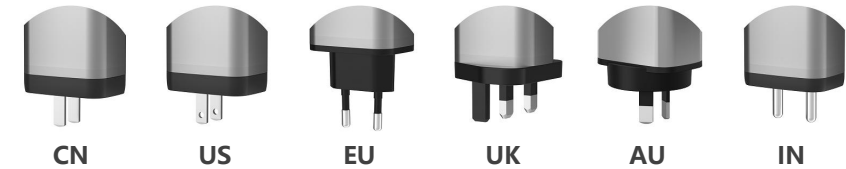

SD 67W C




Model: RY-U67-C GaN
 Input: 100-240V-50/60Hz 1.7A
 Output: 67W (Max)

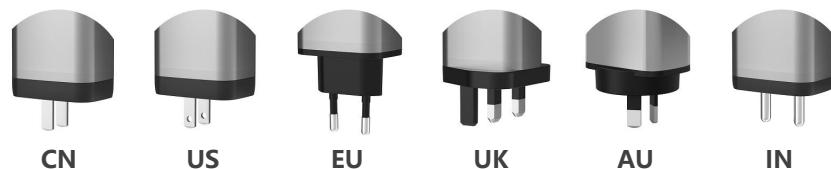

SD 67W A+C



Model: RY-U67-AC GaN
 Input: 100-240V-50/60Hz 1.7A
 Output: USB-A: 30W (Max)
 TYPE-C: 67W (Max)
 Total Output: USB-A+TYPE-C: 12W+45W (Max: 57W)

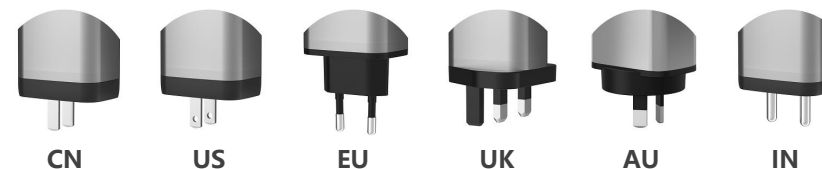

SD 67W C+C




Model: RY-U67-CC GaN

Input: 100-240V-50/60Hz 1.7A

Output: TYPE-C1/C2: 67W (Max)

Total Output: TYPE-C1+TYPE-C2: 45W+20W (Max: 65W)

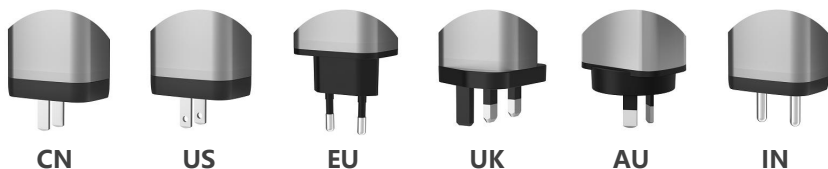

SD 67W A+C+C



Model: RY-U67-ACC GaN

Input: 100-240V-50/60Hz 1.7A


Output: TYPE-C1/C2: 67W (Max)

USB-A: 30W (Max)

Total Output: TYPE-C1+TYPE-C2: 45W+20W

TYPE-C1+USB-A: 45W+18W

TYPE-C1+ (TYPE-C2+USB-A) : 45W+15W

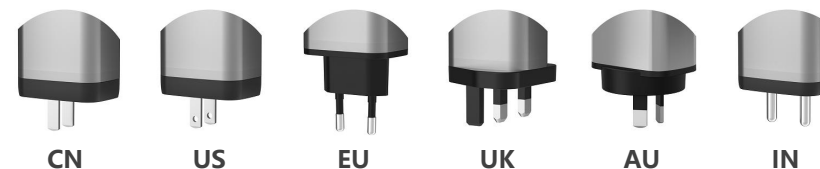

35W GaN Charger

👁️ with Digital Display



GaN

45W GaN Charger

👁️ with Digital Display




GaN

SD Display 35WA+C




Model: RY-U35D-AC-LED GaN
 Input: 100-240V-50/60Hz 1A
 Output: USB-A: 30W (Max)
 TYPE-C: 35W (Max)
 Total Output: USB-A+TYPE-C: 15W

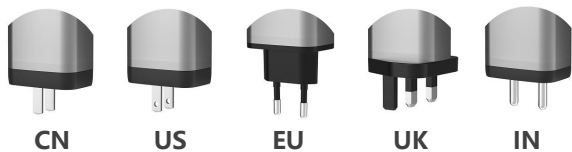

SD Display 45WA+C




Model: RY-U45-AC-LED GaN
 Input: 100-240V-50/60Hz 1.2A
 Output: USB-A: 30W (Max)
 TYPE-C: 45W (Max)
 Total Output: USB-A+TYPE-C: 10W+30W

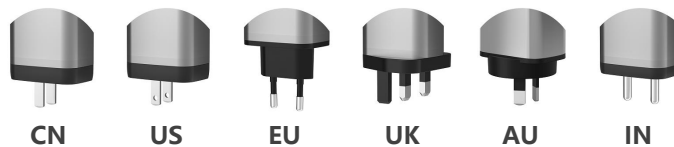

SD Display 67WA+C




Model: RY-U67-AC-LED GaN
 Input: 100-240V-50/60Hz 1.7A
 Output: USB-A: 30W (Max)
 TYPE-C: 67W (Max)
 Total Output: USB-A+TYPE-C:
 12W+45W (Max: 57W)

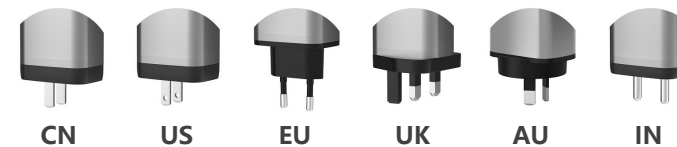

SD 45W C




Model: RY-U45-C GaN
 Input: 100-240V-50/60Hz 1.2A
 Output: 45W (Max)

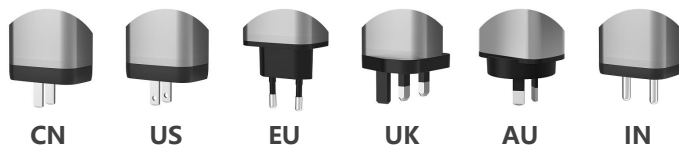

SD 45WA+C




Model: RY-U45-AC GaN
 Input: 100-240V-50/60Hz 1.2A
 Output: USB-A: 30W (Max)
 TYPE-C: 45W (Max)
 Total Output: USB-A+TYPE-C: 10W+30W

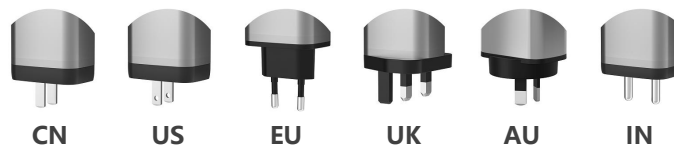

SD 45W C+C



Model: RY-U45-CC GaN
 Input: 100-240V-50/60Hz 1.2A
 Output: TYPE-C1/C2: 45W (Max)
 Total Output: TYPE-C1+TYPE-C2: 25W+20W

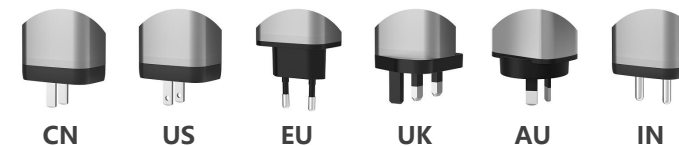

SD 35W C



Model: RY-U35D-C GaN
Input: 100-240V-50/60Hz 1A
Output: 35W (Max)



CN



US



EU



UK

SD 35WA+C



Model: RY-U35D-AC GaN
Input: 100-240V-50/60Hz 1A
Output: USB-A: 30W (Max)
TYPE-C: 35W (Max)
Total Output: USB-A+TYPE-C: 15W




CN



US



EU



UK

SD 35W C+C



Model: RY-U35D-CC GaN
Input: 100-240V-50/60Hz 1A
Output: TYPE-C1/C2: 35W (Max)
Total Output: TYPE-C1+TYPE-C2: 15W



CN



US



EU



UK

SD 25W C




Model: RY-U25E-C GaN
 Input: 100-240V-50/60Hz 0.6A
 Output: 25W (Max)



SD 25WA+C



Model: RY-U25E-AC GaN
 Input: 100-240V-50/60Hz 0.7A
 Output: USB-A: 18W (Max)
 TYPE-C: 25W (Max)
 Total Output: USB-A+TYPE-C: 15W

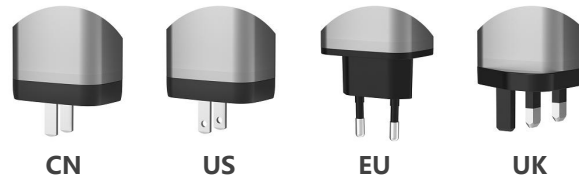


SD AVS 45W A+C



Model: RY-U45A-AC GaN
 Input: 1100-240V-50/60Hz 1A
 Output: USB-A: 30W (Max)
 TYPE-C: 45W-60W (Max)
 Total Output: USB-A+TYPE-C: 20W

***AVS supported (max 60W), Samsung 2.0 protocol supported**

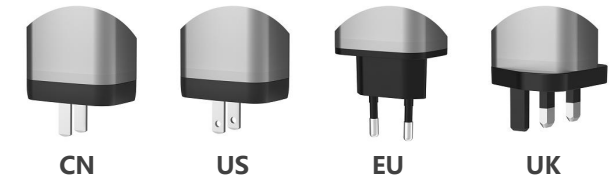

30W



Crystal Edition Charger

Low-Temperature Fast Charging

30W GaN PD Charger (1-Port)



Mini



Low-Temperature

Crystal Power Cube, 35W Lightning Charge Art Tech

35W GaN PD Charger(A+C PORT)

35W



Fast charging




Multi-compatible

Crystal 20W C




Model: RY-U62
Input: 100-240V-50/60Hz 0.6A
Output: 20W (Max)

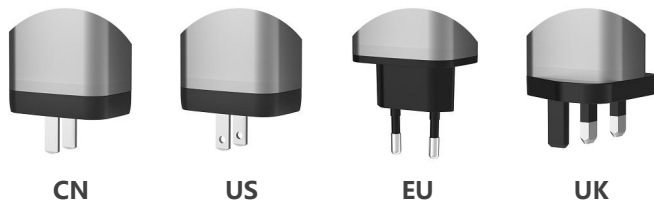

Crystal 30W C



Model: RY-C30B
Input: 100-240V~50/60Hz 0.8A
Output: 30W (Max)

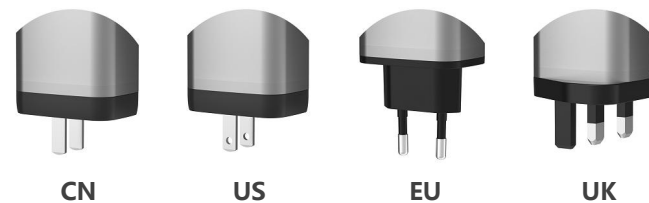

Crystal 33WA+C



Model: RY-U33A


Input: 100-240V~50/60Hz 0.8A

Output: USB-A: 30W (Max)

Type-C: 30W (Max)

PPS: DC3.3V-11V/3A (Max: 33W)

Total Output: Type-C+USB-A: 20W

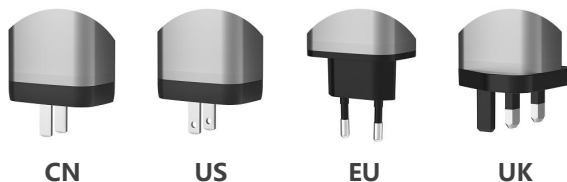

CN

US

EU

UK

Crystal 35W A+C



Model: RY-U35


Input: 100-240V~50/60Hz 0.8A

Output: USB-A: 30W (Max)

Type-C: 35W (Max)

PPS: DC3.3V-11V/3A

Total Output: Type-C+USB-A: 20W

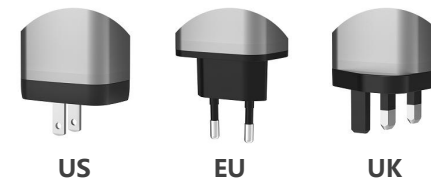

US

EU

UK

Crystal AVS 40W C




Model: RY-C40C-C

Input: 110-240V~50/60Hz 1.2A

Output: 40W-60W (Max)

*step down to 40W after 20 minutes

*AVS supported (max 60W), Samsung 2.0 protocol supported

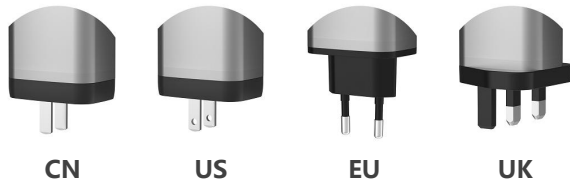

CN

US

EU

UK

Crystal 45W C




Model: RY-C45H-C

Input: 110-240V~50/60Hz 1.2A

Output: 45W (Max)

* No AVS, Samsung 2.0 PPS protocol supported

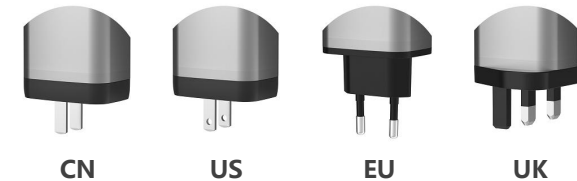

CN

US

EU

UK

Crystal AVS 40W A+C



Model: RY-U40D-AC

Input: 110-240V~50/60Hz 1.2A

Output: TYPE-C: 60W (Max) USB: 30W TYPE-C+USB: 5V4A

*step down to 40W after 20 minutes

*AVS supported (max 60W), Samsung 2.0 protocol supported



US

EU

UK

Crystal Universal 65W




Model: RY-C65F-ALL

Input: 100-240V~50/60Hz 1.2A

Output: TYPE-C: 65W (Max)

*Universal Compatible

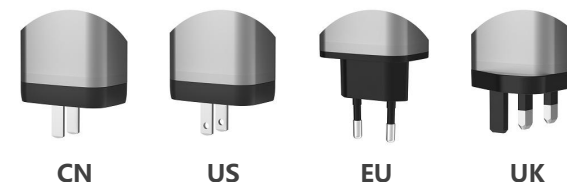

CN

US

EU

UK

Crystal 65W C



Model: RY-C65C
Input: 100-240V~50/60Hz 1.2A
Output: 65W (Max)

New



US

EU

UK

Crystal 65W A+C




Model: RY-C65C-AC
Input: 100-240V~50/60Hz 1.2A
Output :

TYPE-C: 65W

USB: 30W

TYPE-C+USB: 45W+12W

Prototyping

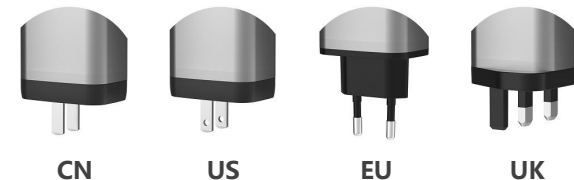

CN

US

EU

UK

IceCube 65W A+C




Model: RY-U65A

Input: 100-240V~50/60Hz 1.7A

Output: USB-A: 30W
Type-C: 65W (Max)

Total Output: USB-A+Type-C: 12W+45W

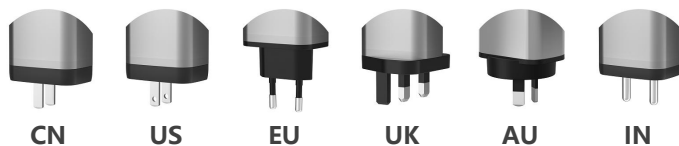

65W A+C+C




Model: RY-U65S

Input: 100-240V~50/60Hz 1.7A

Output : TYPE-C1/C2: (Max: 65W)
USB-A: (Max: 18W)

Total Output: TYPE-C1+TYPE-C2: 45W+20W
TYPE-C1+USB-A: 45W+18W
TYPE-C1+ (TYPE-C2+USB-A) : 45W+15W



IceCube Universal 66W AC



Model: RY-U66

Input: 100-240V~50/60Hz 1A


Output: USB-A: 45W (Max) Type-C: 45W (Max)

Input: 200-240V~50/60Hz 1A

Output: USB-A: 66W (Max) Type-C: 45W (Max)

***Universal Compatible**

***Shared A/C ports, NOT for simultaneous use**

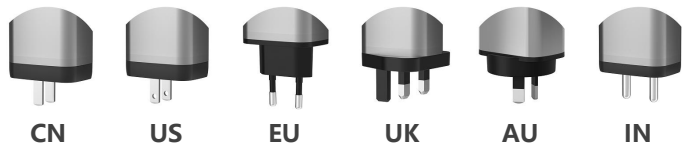

IceCube 45W A+C




Model: RY-U45B

Input: 100-240V~50/60Hz 1.2A

Output: USB-A: 30w (Max)

Type-C: 45w (Max)

Total Output: TYPE-C+USB-A: 5V3A (Max)

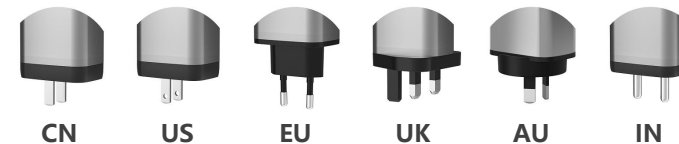

IceCube 45W A+C



Model: RY-C45E-AC

Input: 100-240V~50/60Hz 1.2A

Output: USB-A: 30w (Max)

Type-C: 45w (Max)

Total Output: TYPE-C+USB-A: 10W+30W (Max)



US

EU

UK

AU

IN

IceCube 45W C+C




Model: RY-C45E-CC

Input: 100-240V~50/60Hz 1.2 A

Output : TYPE-C1/C2: 45W (Max)

Total Output: TYPE-C1+TYPE-C2: 25W+20W

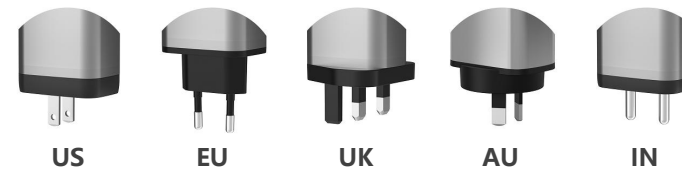

US

EU

UK

AU

IN

IceCube 35W A+C



Model: RY-U35

Input: 100-240V~50/60Hz 0.8A

Output: USB-A: 30W (Max)

Type-C: 35W (Max)

PPS: DC3.3V-11V/3A

Total Output: Type-C+USB-A: 20W



IceCube 40W C+C




Model: RY-C40A

Input: 100-240V~50/60Hz 1 A

Output : TYPE-C1/C2: 40W (Max)

Total Output: TYPE-C1+TYPE-C2: 20W+20W

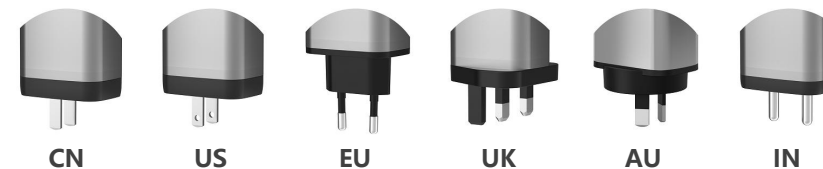


IceCube 30W C



Model: RY-C30B

Input: 100-240V~50/60Hz 0.8A

Output : 30W (Max)

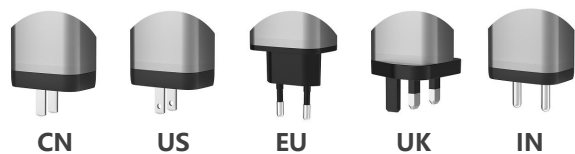

IceCube 33W A+C



Model: RY-U33A


Input: 100-240V~50/60Hz 0.8A

Output: USB-A: 30W (Max)

Type-C: 30W (Max)

PPS: DC3.3V-11V/3A (Max: 33W)


Total Output: Type-C+USB-A: 20W

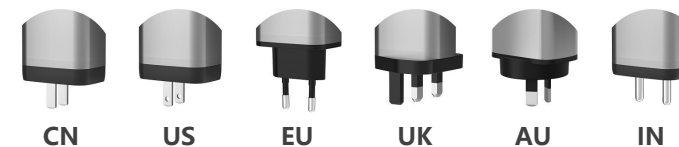

IceCube 20W C




Model: RY-U62 GaN Charger
Input: 100-240V-50/60Hz 0.6A
Output: 20W (Max)

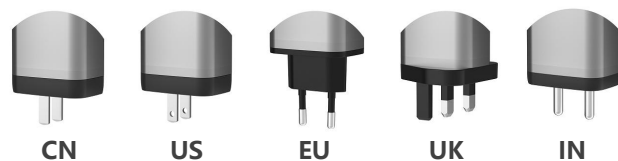

IceCube 20W A+C




Model: RY-U63 GaN Charger
Input: 100-240V~50/60Hz 0.6A
Output: USB-A: 18W (Max)
TYPE-C: 20W (Max)
Total Output: USB+TYPE-C: 15W (Max)

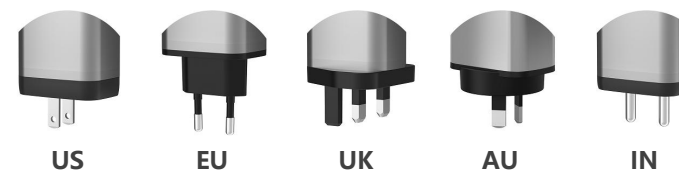

Diverse Designs

More colorful ways to charge

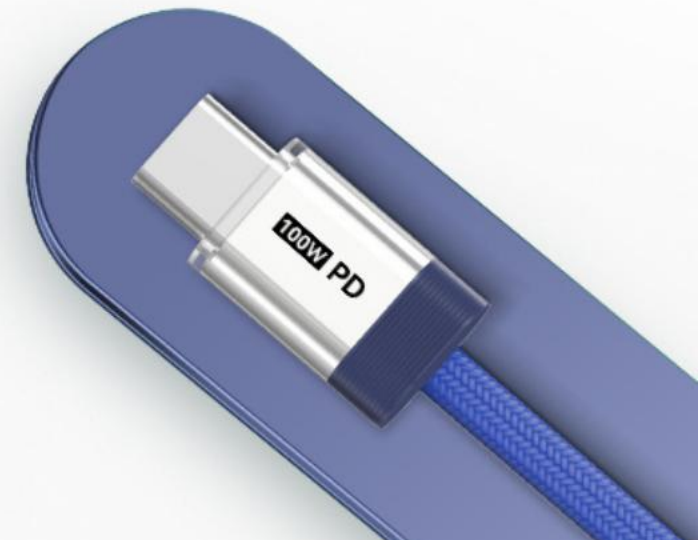

A-C 3A



Length: 1200mm
Material: TPE
Cable OD: 3.8mm
Conductor: 4-core (Copper Clad Steel)

C-C 65W



Length: 1000mm
Material: TPE
Cable OD: 3.5mm
Conductor: 5-core (Copper Clad Steel)

Braided C-C 65W



Length: 1000mm
Material: 48 braided
Cable OD: 3.5mm
Conductor: 5-core (100% Pure Copper)

YouPin A-C 5A



Length: 1200mm
Material: TPE / (48 braided optional)
Cable OD: 3.8mm
Conductor: 5-core (100% Pure Copper)

YouPin C-C 65W



Length: 1200mm
Material: TPE / (48 braided optional)
Cable OD: 3.8mm
Conductor: 5-core (100% Pure Copper)

YouPin C-L 30W



Length: 1200mm
Material: TPE / (48 braided optional)
Cable OD: 3.8mm
Conductor: 5-core (100% Pure Copper)

SuRui A-C 5A



Length: 1200mm
Material: 48 braided / Aluminium Alloy
Cable OD: 4.0mm
Conductor: 5-core (100% Pure Copper)

SuRui C-C 65W/100w




Length: 1200mm
Material: 48 braided / Aluminium Alloy
Cable OD: 4.0mm
Conductor: 5-core (100% Pure Copper)

SuRui C-L 30W




Length: 1200mm
Material: 48 braided / Aluminium Alloy
Cable OD: 4.0mm
Conductor: 5-core (100% Pure Copper)

YouYun A-C 5A

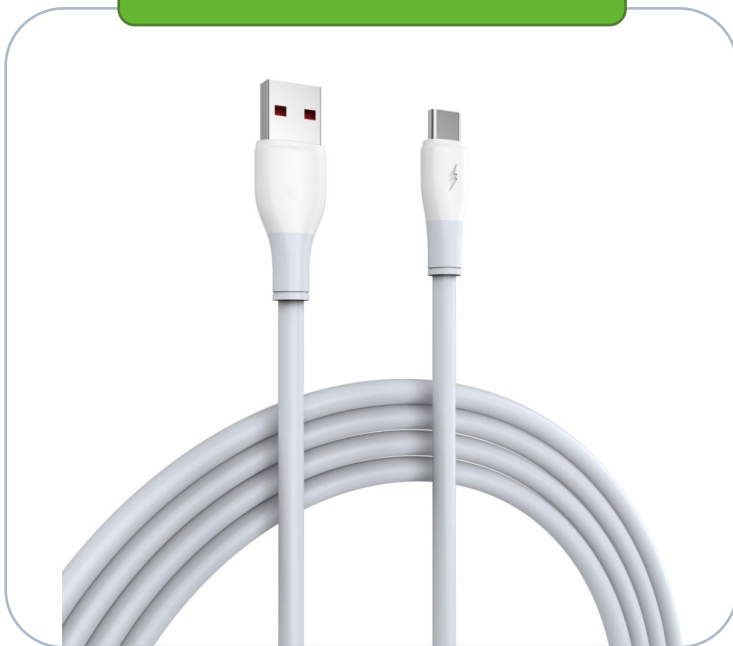


Length: 1200mm
Material: Silicone-like TPE
Cable OD: 4.5mm
Conductor: 5-core (100% Pure Copper)
Connector Pin: Nickel Plated

YouYun C-C 65W/100w

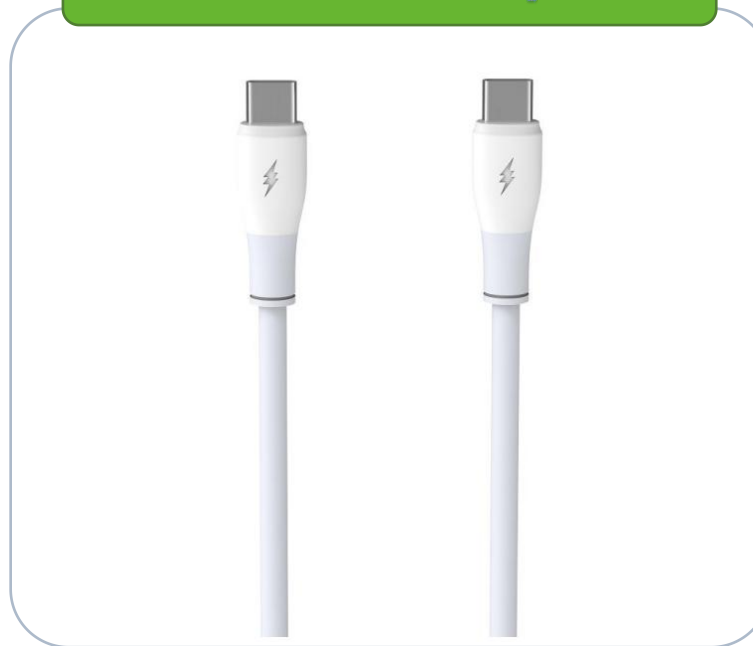

Length: 1200mm
Material: Silicone-like TPE
Cable OD: 4.5mm
Conductor: 5-core (100% Pure Copper)
Connector Pin: Nickel Plated

YouYun C-L 30W

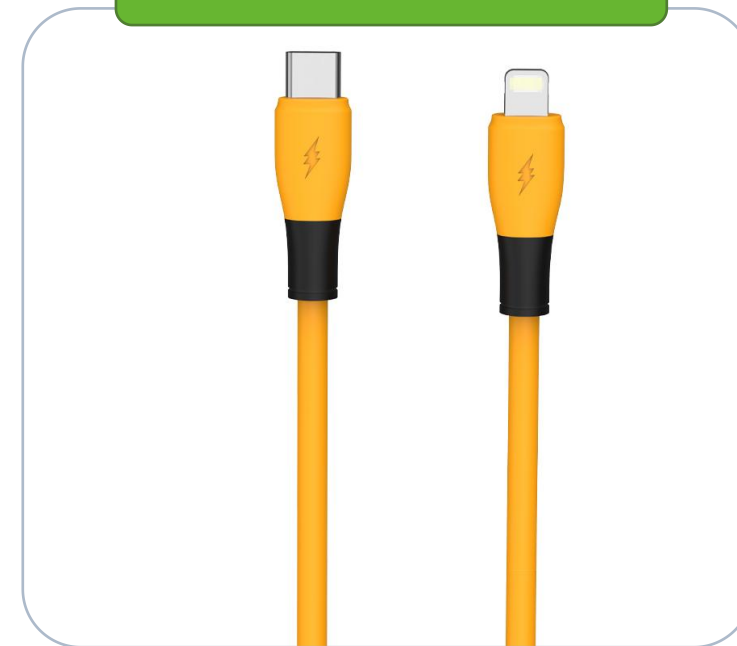

Length: 1200mm
Material: Silicone-like TPE
Cable OD: 4.5mm
Conductor: 5-core (100% Pure Copper)
Connector Pin: Nickel Plated

XunJie A-C 5A



Length: 1200mm
Material: 48 braided / Aluminium Alloy
Cable OD: 4.0mm
Conductor: 4-core (100% Pure Copper)

XunJie C-C 65W/100W




Length: 1200mm
Material: 48 braided / Aluminium Alloy
Cable OD: 4.0mm
Conductor: 5-core (100% Pure Copper)

Ultrree C-C65W/100W




Length: 1200mm
Material: 48 braided / ABS / Metal
Cable OD: 4.0mm
Conductor: 5-core (100% Pure Copper)

YouYun A-C 5A

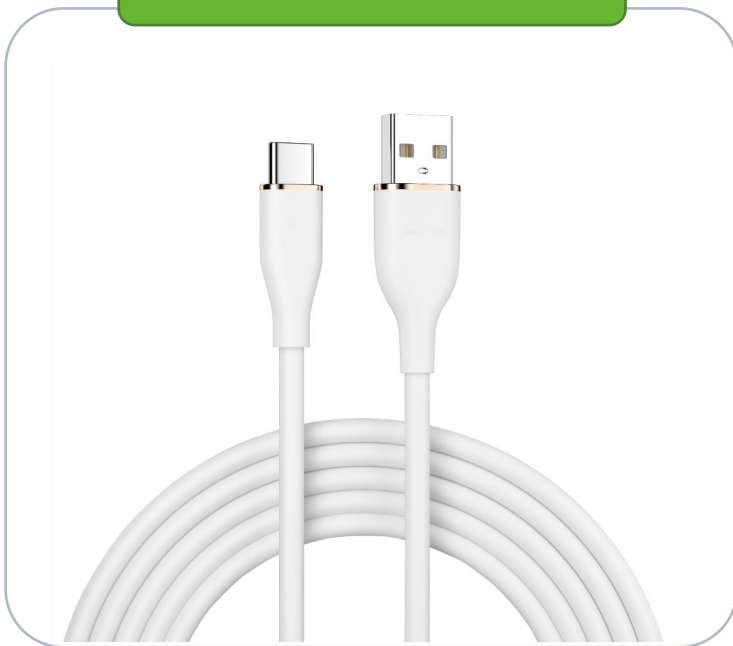

Length: 1200mm
Material: Silicone
Cable OD: 4.0mm
Conductor: 5-core (100% Pure Copper)
Connector Pin: Nickel Plated

YouYun C-C 65W/100w

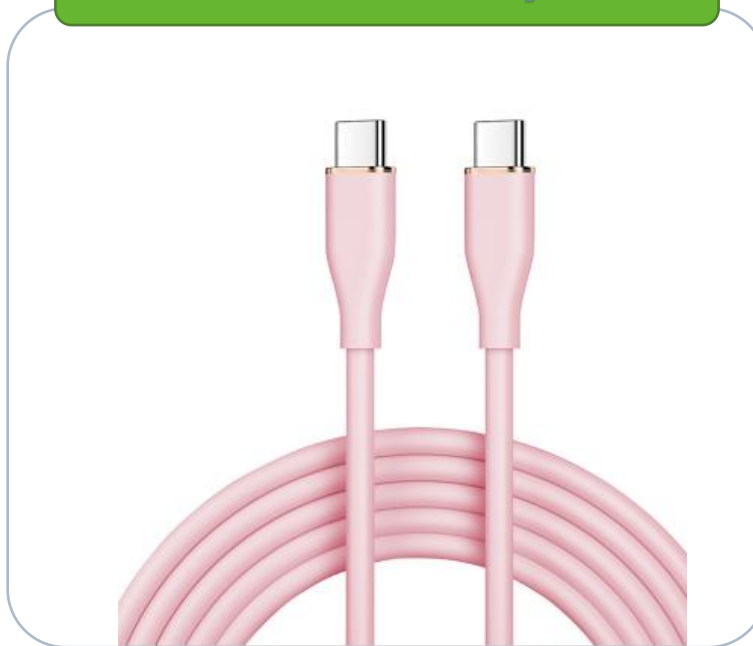

Length: 1200mm
Material: Silicone
Cable OD: 4.0mm
Conductor: 5-core (100% Pure Copper)
Connector Pin: Nickel Plated

YouYun C-L 30W



Length: 1200mm
Material: Silicone
Cable OD: 4.0mm
Conductor: 5-core (100% Pure Copper)
Connector Pin: Nickel Plated

YouYue C-L 30W



Length: 1200mm
Material: 48 braided / Aluminium Alloy
Cable OD: 4.0mm
Conductor: 5-core (100% Pure Copper)
Feature: Power Display

YouYue C-C 65W/100W



Length: 1200mm
Material: 48 braided / Aluminium Alloy
Cable OD: 4.0mm
Conductor: 5-core (100% Pure Copper)
Feature: Power Display

SpeedLink A-C 6A




Length: 1200mm
Material: 48 braided / Aluminium Alloy
Cable OD: 4.5mm
Conductor: 5-core (100% Pure Copper)

SpeedLink 65W/100W



Length: 1200mm
Material: 48 braided / Aluminium Alloy
Cable OD: 4.5mm
Conductor: 5-core (100% Pure Copper)

SpeedLink 65W/100W

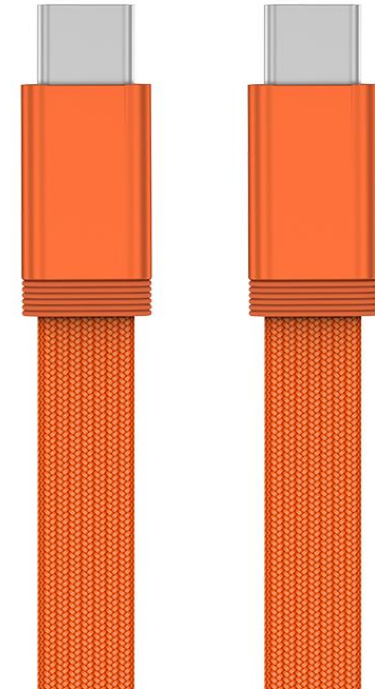

Length: 1200mm
Material: 48 braided / Aluminium Alloy
Cable OD: 4.5mm
Conductor: 5-core (100% Pure Copper)

YouDi Frosted CC 65W/100W




Length: 1200mm
Material: 48 braided / ABS Clear Shell
Cable OD: 3.8mm
Conductor: 5-core (100% Pure Copper)

YouDi Frosted CL 30W




Length: 1200mm
Material: 48 braided / ABS Clear Shell
Cable OD: 3.8mm
Conductor: 5-core (100% Pure Copper)

BinFen Crystal C-L 30W

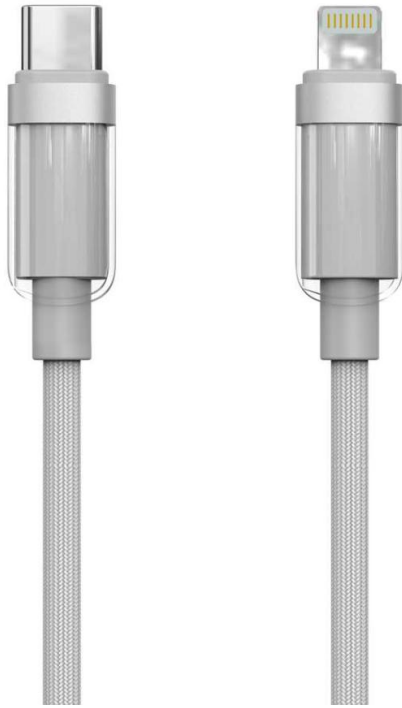

Length: 1200mm
Material: 48 braided / ABS Clear Shell
Cable OD: 4.0mm
Conductor: 5-core (100% Pure Copper)

BinFen Crystal CC 65W/100W

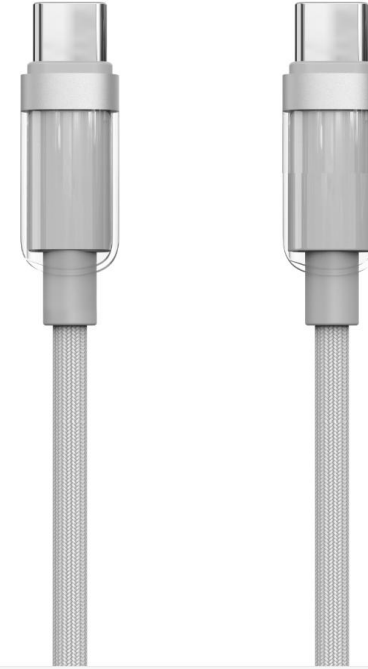

Length: 1200mm
Material: 48 braided / ABS Clear Shell
Cable OD: 4.0mm
Conductor: 5-core (100% Pure Copper)

YouYun Magnetic CC/CL



Length: 1200mm
Material: 48 braided / Silicone
Cable OD: 3.8mm
Conductor: 5-core (100% Pure Copper)
Feature: Magnetic Coiled Design

Utree Magnetic CC/CL



Length: 1200mm
Material: 48 braided / ABS / Metal
Cable OD: 3.8mm
Conductor: 5-core (100% Pure Copper)
Feature: Magnetic Coil Storage Design

Ultree 2-in-1



Length: 1200mm

Material: 48 braided / Aluminium Alloy

Cable OD:

Conductor:

Feature: Apple Watch Charger

Comming Soon

SuRui 3-in-1 100W



Length: 1200mm (800mm+400mm)

Material: braided / TPE / Aluminium Alloy

Cable OD: 4.5mm

Conductor:

- USB-C: 5-core (100% Pure Copper)
- Lightning: 3-core (100% Pure Copper) No Data Transfer
- Watch: 2-core (100% Pure Copper)

Watch Charging Solution: DiXinYinLi (No future upgrade needed)

Power Up

Essential charging accessories



T3 3-in-1 Wireless Charger



Model: T3 Wireless Charger
Material: Aluminium Alloy+ABS+Silicone
Size: 18*70*128mm
Weight: 128g
Compatibility: iPhone, AirPods, Apple Watch
Input: 9V/12V 3A (MAX)
Output :
iPhone 15W (MAX)
Watch 2.5W
Earphones 3.5W (MAX)
Color: Space Gray, Silver
Version: Regular/Cracked/Oi2

T9 3-in=1 Wireless Charger



Model: T9 Wireless Charger
Material: PC+ABS+Aluminium Alloy
Size: 140*70*20mm
Weight: 194g
Compatibility: iPhone, AirPods, Apple Watch
Input: 9V/12V 3A (MAX)
Output:
iPhone 15W (MAX) ,
Watch 2.5W
Earphones 3.5W (MAX)
Color: Space Gray, Silver

T16 Power Bank



Model: T16 Magnetic Power Bank
Material: Aluminium Alloy+PC+ABS+Silicone
Size: 100*68*17mm
Weight: 185g
Compatibility: iPhone, Apple Watch
Capacity: 5000mAh
Input: 9V/12V 2A (MAX)
Output : iPhone 15W (MAX) , Watch 2.5W
Color: Space Gray, White

T17 Power Bank



Model: T17 Magnetic Power Bank
Material: PC+ABS+Zinc Alloy
Size: 110*69*25mm
Weight: ≈236.5g
Compatibility: iPhone, Apple Watch
Capacity: 10000mAh
Input: 5V/3A 9V/2A
Output : iPhone 15W (MAX) , Watch 2.5W (MAX)
Color: White, Grey

T18 3in1 Power Bank



Model: T18 3in1 Magnetic Power Bank
Material: PC+ABS
Size: 60*23*95mm
Input: 5.0V/3A 9.0V-2.22A
12V/1.67A20W (MAX)
Input 1: 15W (MAX) for smartphones
Input 2: 2.5W (MAX) for smart watches
Input 3: 3.5W (MAX) for earbuds
Weight: ≈184g
Color: White, Black

RY-V60



- Input: DC12-24V
- Output:
- TYPE-C Cable (30W Max) : 5V3A, 9V3A, 12V/2.5A
- USB-C (30W MAX) : 5V3A, 9V3A, 12V/2.5A
- USB-A (30W Max) : 5V3A, 9V3A, 12V/2.5A
- Type C Cable+USB-C=30W+30W=60W
- Type C cable+USB-A=30W+30W=60W
- USB-C+USB-A=5V/3.4A 17W
- Type C Cable+USB-C+USB-A=30W+17W=47W
- Color: Black or custom color
- Material: Body: PC, Rear: Aluminium Alloy Top: Fabric finish
- Size: 92.5*44MM, Retractable 70MM
- Weight: 76.4g
- Full protocol, super fast charging for brands such as Huawei, Samsung, MI, OPPO, VIVO etc.

RY-V130



- Input: DC12-24V
- Output:
- C1-100W: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A
- PPS (105W) : 3.3-11V/5A, 3.3-21V/5A
- C2-30W: 5V/3A, 9V/3A, 12V/2.5A
- 12V-PPS (33W) : 3.3-11V/3A
- 24V-PPS: 3.3-11V3A; 3.3-16V2.2A
- A1-30W: 5V/3A, 9V/3A, 12V/2.5A
- C1+A1=100W+30W=130W
- C1+C2=100W+30W=130W
- A1+C2=24W Max
- A1+C2+C1=24W+100W=124W Max
- Color: Black or custom color, with LED ring
- Weight: 69g
- Material: PC V0 FR, matte + CF pattern
- Size: 83.5mm*42.75mm

RY-V160



- Input: DC12-24V
- Output:
- C1-100W: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A
- PPS (105W) : 3.3-11V/5A, 3.3-21V/5A
- C2-30W: 5V3A, 9V3A, 12V2.5A
- PPS (33W) : 3.3-5.9V/3A 3.3-11V/3A
- A1-30W: 5V3A, 9V3A, 12V2.5A
- C1+C2 =100W+30W=130W
- C1+A=100W+30W=130W
- C2+A=30W+30W=60W
- C1+C2+A=100W+30W+30W=160W
- Color: Black or custom color, with LED ring
- Weight: 69g
- Material: PC V0 FR, matte + CF pattern
- Size: 83.5mm*42.75mm

RY-V165



- Input: DC12-24V
- Output:
- USB-C1 PD3.1 140W: 5V3A, 9V3A, 12V3A, 15V3A, 20V5A, 28V5A
- PPS (105W) : 3.3-11V/5A, 3.3-21V/5A
- USB-C2-30W: 5V3A, 9V3A, 12V2.5A
- PPS (33W) : 3.3-5.9V/3A 3.3-11V/3A
- USB-A1-30W: 5V3A, 9V3A, 12V2.5A
- C1+A1=105W+30W=135W
- C1+C2=105W+30W=135W
- A1+C2=30W+30W=60W
- A1+C2+C1=30W+30W+105W=165W Max
- Color: Black or custom color with LED ring
- Material: PC V0 FR, matte + CF pattern
- Size: 83.5mm*42.75mm
- Weight: 69g

RY-V48A



- Input: DC12-24V
- Output:
- USB-A (QC3.0 18W) : 5V/3A,9V/2A,12V/1.5A
- USB-C (PD3.0 30W) : 5V/3A,9V/3A,12V/2.5A,
- PPS: 3.3-11V/3A 3.3-12V/2A
- USB-A+USB-C: 48W
- Color: Black or custom color
- Material: PC V0 FR, matte + CF pattern
- Size: 71*34mm
- Weight: 25g

RY-V45



- Input: DC12-24V
- Output:
- (PD3.0 45W) :
- 5V/3A, 9V/3A,12V/3A,15V3A, 20V2.25A (45W)
- Color: Black or custom color
- Material: PC V0 FR, matte + CF pattern
- Size: 71*34mm
- Weight: 19g

RY-V30



- Input: DC12-24V
- Output:
- USB-A: 5V/3A,9V/2A,12V/1.5A (QC18W)
- USB-C: 5V/3A,9V/3A,12V/2.5A (PD30W)
- TOTAL: 5V/3A 15W
- Color: Metallic
- Material: Aluminium Alloy
- Size: 20.5mm*39.3mm
- Weight: 20.9g

RY-V30A



- Input: DC12-24V
- Output:
- USB-A: 5V/3A,9V/2A,12V/1.5A (QC18W)
- USB-C: 5V/3A,9V/3A,12V/2.5A (PD30W)
- PPS: 3.3-5.9V/3A,3.3-11V/2.75A
- TOTAL: 48W
- Color: Silver/Grey/Gunmetal
- Material: Zinc Alloy
- Size:
- Weight:

RY-V48



- Input: DC12-24V
- Output 1: 5V3A,9V3A,12V2.5A
- Output 2: 5V3A,9V2A,12V1.5A
- Output A1+C1: 5V-3A (dynamic current allocatoin)
- Wattage: 30W
- Color: Blue/Grey
- Material: Aluminium Alloy+PC
- Size:
- Weight:

RY-V95



- input: DC12V-24V
- TYPE-C: 5V3A.9V3A.12V3A 15V3A.20V3.25A
- USB-A: 5V3A.9V3A.12V.2.5A
- Wattage: 65W
- Color: Gold/Silver
- Material: Aluminium Alloy+PC
- Size:
- Weight:

WFYEAR ELECTRONICS

POWERING THE FUTURE OF GLOBAL 3C ACCESSORIES

Build Your Next Product with WFYEAR

Flexible MOQ & OEM/ODM Customization

Flexible solutions for different markets and project requirements.

Branding, Packaging & Functional Customization

Support from logo and colors to packaging and product configuration.

Quality Control & Compliance Support

Project support from sampling through mass production.

Fast Sampling & Responsive Delivery Support

Efficient communication, follow-up and quotation support.

CONTACT & DOWNLOAD

Scan to chat on WhatsApp or visit our website for a fast quote.



WEBSITE

www.wfyear.net



WHATSAPP

+86 188 1485 5898

Business Inquiry

sales@wfyear.net

Headquarters

Hangzhou, China

Official Website

www.wfyear.net